
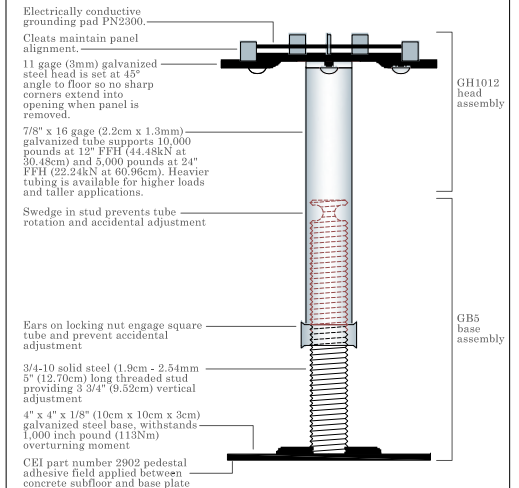


Product Data Sheet

10GGX Understructure Product Data Sheet

2.00	Model Number	30GGS	
2.10	Units	USCS	SI
2.11	Minimum Finish Floor Height	3 In	7.62 cm
2.12	Maximum Finish Floor Height Using Standard 1000 Inch-Pound (113Nm) Pedestals with 10 P/F ² (48kg/m ²) Horizontal Load (CAUTION Seismic Load May Reduce Allowable Maximum Height or Increase Pedestal Overturning Moment Requirement, Refer to ASCE7)	25 In	63.50 cm
2.13	Vertical Load Enhancement	None	
2.14	Stringer Span (Panel x Panel)	1 Panel x 1 Panel	
2.15	Pedestal Spacing	24 In	60.96 cm
2.15	Uniform Stringer Load at .10" (2.5mm) Deflection	150 lbs	667 N
2.16	Concentrated Stringer Load at .10" (2.5mm) Deflection	100 lbs	445 N
2.17	Standard Pedestal Axial Load at Various Finish Floor Heights	4"-12" (10-30cm)	10,000 lbs
2.18	(Higher ratings are available upon request)	13"-18" (33-46cm)	7,000 lbs
2.19		19" (48cm) and Up	5,000 lbs
2.20	Standard Pedestal Overturning Moment	Adhesive	1,000 in lbs
2.21	(Higher ratings are available upon request)	4 Bolts	1,000 in lbs
2.22	Standard Pedestal Base Size	4 In x 4 In	10.15 cm x 10.16 cm
2.23	Materials of Construction	Galvanized Steel	
2.24	Ease of Access to Subfloor	High	
2.25	Nonmagnetic (Nonferrous)	No	
2.26	Fuel Contribution Factor per ASTM E-84-84	0	
2.27	Flame Spread per ASTM E-84-84	0	
2.28	Smoke Density Factor per ASTM E-84-84	0	
2.29	Static Dissipation	Excellent	
2.30	Maximum Ohms (DC) Between Uncovered Surface and Pedestal	10	
2.31	Maximum Ohms (DC) Between 2 pedestals 20' Apart	1	
2.32	Maximum Ohms at 1 MHz Between 2 pedestals 20' Apart	15	
2.33	Suitable For Use As a Signal Reference Grid	Yes	
2.34	Resistance to Oxidization in High Humidity	Fair	
2.35	Resistance to Acids and Polar Solvents	Poor	
2.36	Resistance to Organic (Nonpolar) Solvents	Excellent	
2.37	Suitable Panel Types	All	
2.38	Stringer Dimensions	Width	1.1 In
2.39		Height	0.8 In
2.40		Length	21.8 In
2.41		Material Thickness	0.06 In
2.42	Weight - Pedestals and Stringers at 12" (30cm) Finish Floor Height	1.2 lbs/ft ²	5.86 kg/m ²
2.43	Warranty	1 Year	
2.44	Approximate Delivery	<3000 Ft ² (300m ²)	4 Weeks
2.45		>3000 Ft ² (300m ²)	5 Weeks



CEI PART #: 10 Series Understructure	
DRAWN BY: M C.	
PAPER SIZE = 8.5" x 11" LASER	
SHEET: 1	SCALE: 2.5 = 1
DATE: 14 Dec 2015	
PATH=C:\Users\Ingo\Desktop\HD 24 Product Drawings.dwg	



COMPUTER ENVIRONMENTS, INC.
 1616 JOHN WEST ROAD DALLAS, TX USA 75228 214 321 1234 FAX 214 321 2333 ceifloor.com
 100% U.S. Owned 100% U.S. Made

PART OR PROJECT DESCRIPTION	10GGX Understructure Product Data Sheet
-----------------------------	---