


- Black or Brown PVC Edge Trim
- 1/16" Perforated High Pressure Laminate (HPL)
- 14 Gage Perforated Galvanized Steel
- 16 Gage Galvanized Steel Side Rails
- 16 Gage Galvanized Steel Supports



**CEI Model GG908 HPL06Z2ST61B 1936 Hole 25% Open Area (1/16" HPL Covering)**  
**GG908 HPL12Z2ST61B (1/8" HPL Covering)**  
**Perforated Air Flow Panel**

JOB OR PART NUM: GG908	REVISIONS		APPROVALS	
CEI FILE NAME: GG908 PERFORATED PANEL	BY:	DATE:	ENG:	DATE:
DRAWN BY: J THARP	BY:	DATE:	SAFETY:	DATE:
DATE: 5 DEC 2012	BY:	DATE:	ENV:	DATE:
SHEET: 1 OF 1	SCALE: 1 = 4	AS BUI LT:	DATE:	FI RE:
C:\DOCUMENTS AND SETTINGS\AUTHORIZED USER\DESKTOP\CEI AUTOCAD DRAWINGS\FLOOR PARTS				

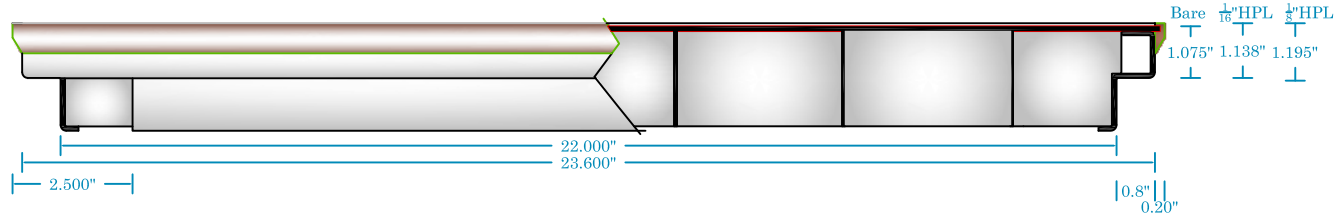


**COMPUTER ENVIRONMENTS, INC.**  
 1616 JOHN WEST ROAD DALLAS, TX, USA 75228 214 321 1234 FAX 214 321 2333 [ceifloor.com](http://ceifloor.com)  
 100% U.S. Owned 100% U.S. Made

PART OR PROJECT	1936 HOLES X 0.325" DIA = 160 SQUARE INCH OPEN AREA
DESCRIPTI ON	GG908 SERIES PERFORATED AIR FLOW PANEL

# Computer Environments, Inc. Air Flow Test Report

## CEI Model # GG908 25% open area

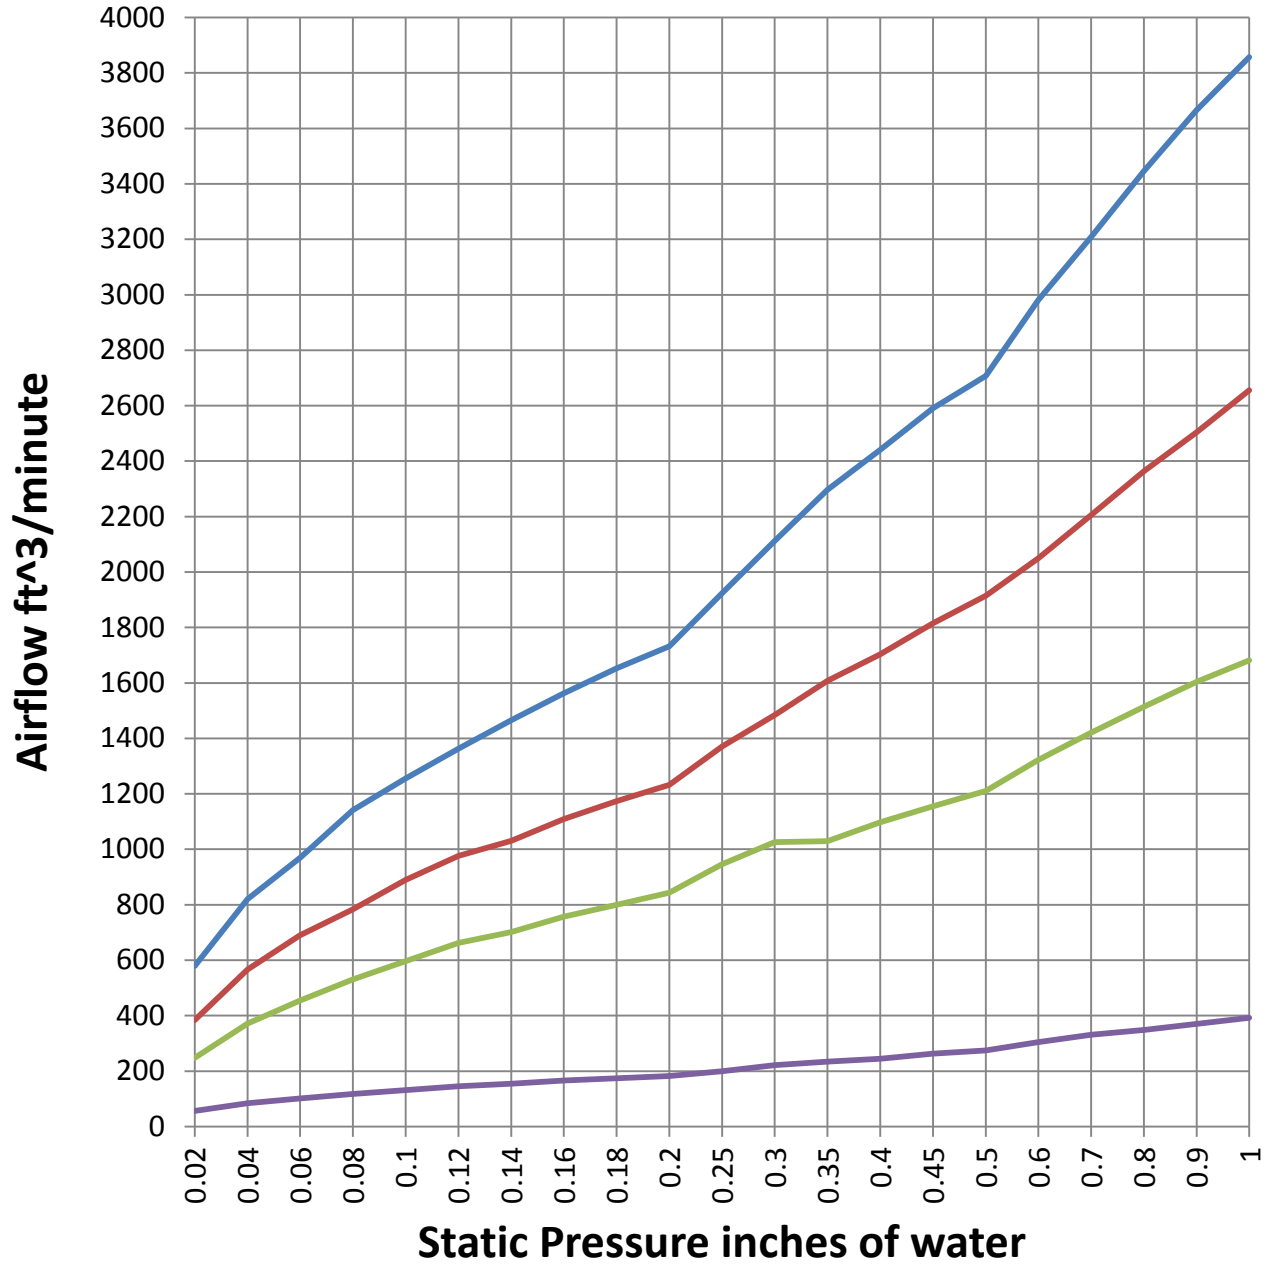

- CEI GG908 no damper
- CEI GG908 damper full open
- CEI GG908 damper 50% open
- CEI GG908 damper closed