


Product Data Sheet

GR112 Panel Performance Data Sheet On 10 and 40 Series Understructure

		10 Series Pedestal Only Understructure		40 Series Understructure	
		USCS	SI	USCS	SI
3.00	Model Number				
3.10	Maximum Rolling Load :				
3.12	Wheel 1: 10 Passes	600 lbs	2.67 kN	800 lbs	3.56 kN
3.13	Wheel 2: 10,000 Passes	600 lbs	2.67 kN	800 lbs	3.56 kN
3.14	Max. Rolling Load Permanent Set, in., Wheel 1:	0 in	0.00 mm	0 in	0.00 mm
3.15	(Note 1)	10 Passes	0.010 in	0.24 mm	0.010 in
3.16	Max. Rolling Load Permanent Set,	Wheel 2: Start	0 in	0.00 mm	0 in
3.17	(Note 2)	500 Passes	0.014 in	0.34 mm	0.014 in
3.18		5,000 Passes	0.018 in	0.44 mm	0.018 in
3.19		10,000 Passes	0.020 in	0.49 mm	0.020 in
3.20	Design Concentrated Load, 1" X 1" (2.54cm x 2.54cm) Block	1250 lbs	5.56 kN	1250 lbs	5.56 kN
3.21	Ultimate Concentrated Load,	2916 lbs	12.97 kN	2916 lbs	12.97 kN
3.22	Design Uniform Load,	300 lbs/ft ²	12.40 kN/m ²	300 lbs/ft ²	12.40 kN/m ²
3.23	Ultimate Uniform Load	900 lbs/ft ²	37.19 kN/m ²	900 lbs/ft ²	37.19 kN/m ²
3.24	Maximum Drop Height for Impact, in.: Body 1 (Note 3)	144 lbs	0.64 kN	144 lbs	0.64 kN
3.25	Maximum Drop Height for Impact, in.: Body 2 (Note 4)	84 lbs	0.37 kN	84 lbs	0.37 kN
3.26	Materials of Construction - Shell	Galvanized Steel			
3.27	Materials of Construction - Core	Resin Fiber			
3.28	Painted Parts	None			
3.29	Ease of Access to Subfloor	High			
3.30	Ease of Field Cutting and Sawing	Easy			
3.31	Nonmagnetic (Nonferrous)	No			
3.32	Fuel Combustion Factor per ASTM E-84-84	5			
3.33	Flame Spread per ASTM E-84-84	5			
3.34	Smoke Density Factor per ASTM E-84-84	0			
3.35	Static Dissipation	Excellent			
3.36	Thermal Conductivity	1.2 BTU/hr x ft ² x °F		6.80832 Watt/m2 x Kelvin	
3.37	Max. Offsets (DC) Between Uncovered Surface and Bottom Pan	1			
3.38	Resistance to Oxidization in High Humidity	Fair			
3.39	Resistance to Acids and Polar Solvents	Poor			
3.40	Resistance to Organic (Nonpolar) Solvents	Fair			
3.41	Suitable Covering Material	All			
3.42	Weight,	7.5 lbs/ft ²		36.62 kg/m ²	
3.43	Overall Dimensions Less Covering Material, L' X W'	24in x 24in		60.96cm x 60.96cm	
3.44	Depth at Edge Less Covering Material, in.	1.07 in		27.18 mm	
3.45	Warranty	1 Year			
3.46	Approximate Delivery	<3000 Ft ² (300m ²)		3 Weeks	
3.47		>3000 Ft ² (300m ²)		5 Weeks	

Notes:

1. Wheel 1: 3" dia. x 1-13/16" wide
2. Wheel 2: 6" dia. x 1-1/2" wide
3. Body 1: 2" dia. steel indenter, 10 lbs.
4. Body 2: 12" dia. soft bag, 90 lbs.
5. Panels and understructure can be custom designed to meet the requirements of any application.
6. All values given are for panels less covering material.

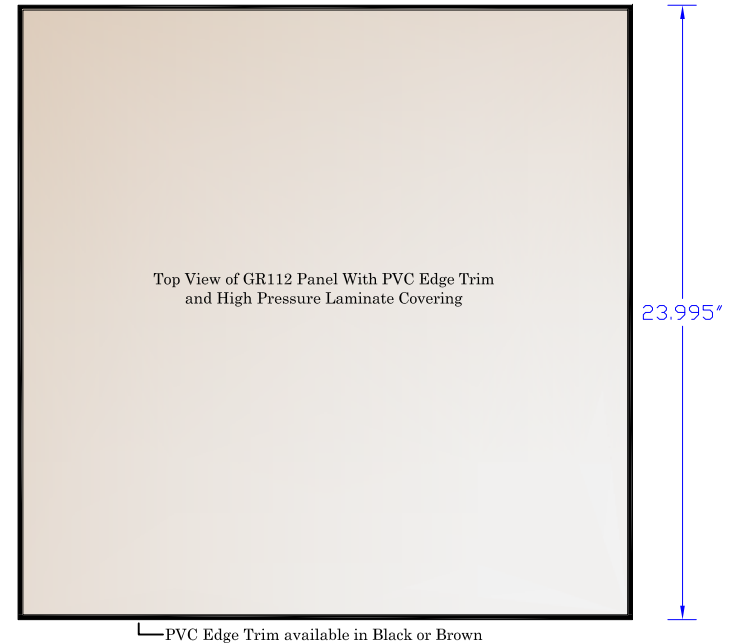


23.995" x 23.995" nominal standard GR112 panel

23.995"

PVC Edge Trim Available In Black Or Brown

NEMA LD3 High Pressure Laminate Covering



22 Gage Galvanized Steel Top and Bottom

Ansi 208.1 Core

23.800"

JOB: Typical	REVISED BY:	DATE:	DESCRIPTION:
CEI PART #: GR112 HPL06			
DRAWN BY: J THARP			
PAPER SIZE = 8.5" x 11" LASER			
SHEET: 1 of 1	SCALE: 2.5 = 1	DATE: 2 Aug 2012	
PATH=C:\documents and settings\authorized user\desktop\cei autocad drawings\floor parts\GR112 HPL06 panel section with product data.dwg			



Computer Environments Inc
 1616 JOHN WEST ROAD DALLAS, TX, USA 75228 214 321 1234 FAX 214 321 2333 ceifloor.com
 Manufactured in the U.S.A.

PART OR PROJECT DESCRIPTION Standard Panel Section With Factory Applied 1/16" High Pressure Laminate